
REV	DESCRIPTION	DATE



SPRING

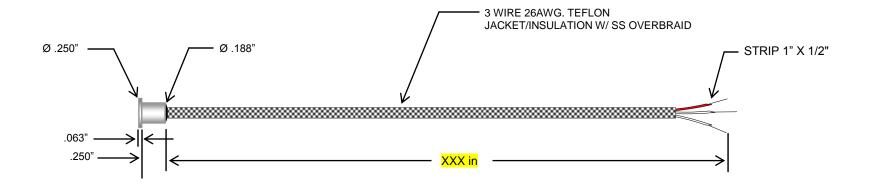

Large (.175"ID) _____

Small (.136"ID) _____

Specifications

ELEMENT: 100 Ohm Plt Thin Film - Class B to DIN EN 60751

CONFIG: Single 3 WIRE

TEMP RANGE: -50 to 260°C (-58 to 500°F)
MEASURING RANGE: -0 to 250°C
CASE: 300 series Stainless Steel.

LEADS: Teflon jacket/Insulation/SSOB. (Teflon 0-500°F)

TIME CONSTANT RANGE: 1.5 – 3.0 Sec. Typical value in moving water. **INSULATION RESISTANCE:** 10megaOhms min. at 100VDC, leads to case.

Approved by: _____ Ref: _____

18714 PARTHENIA STREET - NORTHRIDGE - CALIFORNIA 91324 - USA

PHONE: (818) 886-3755 - FAX: (818) 772-7690

PRODUCTION CODE: TOPHAT-.188-S3-100L-385-.25-L3-XX-SSXX-BW-0



PART NO. R026-000000XX

OCR#

XXXXX

DESCRIPTION: BEARING RTD

DATE: XX/XX/XX

REV: NC REV: