


REV	DESCRIPTION	DATE

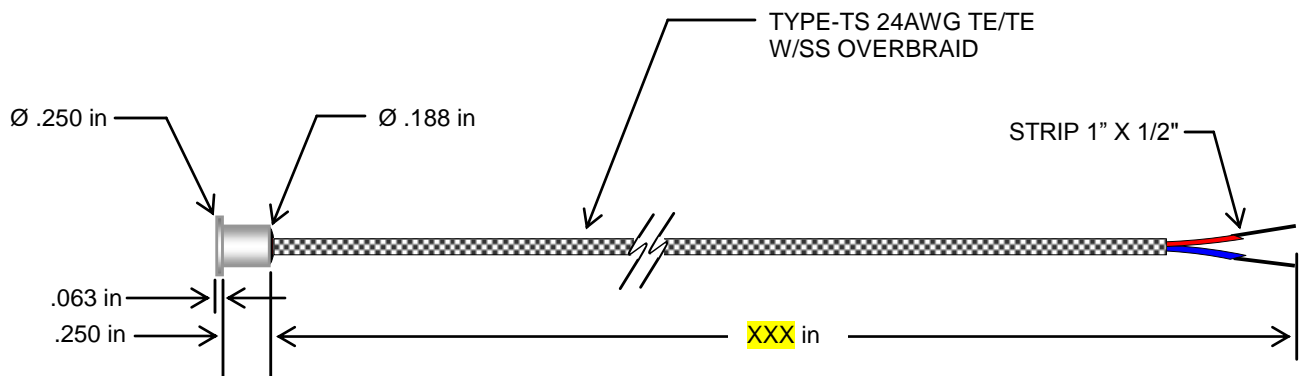

Large (.175"ID) _____
 Small (.136"ID) _____

Approved by: _____ Ref: _____

Specifications

ELEMENT: TYPE-T (COPPER/CONSTANTAN) Special limits of error
CONFIG: Single
TEMP RANGE: -180 to 260°C (-300 to 500°F)
 *-200 to 0°C 0.5°C or ± 0.8% (whichever is greater)
CASE: 300 series Stainless Steel.
LEADS: Teflon jacket/Insulation/SSOB. (Teflon 0-500°F)
TIME CONSTANT RANGE: Typical value in moving water.
 • Grounded Junction: 0.3 Seconds
 • Ungrounded Junction: 1-6 Seconds
INSULATION RESISTANCE: 10megaOhms min. at 100VDC, leads to case, ungrounded junctions only.

18714 PARTHENIA STREET - NORTHRIDGE - CALIFORNIA 91324 - USA PHONE: (818) 886-3755 - FAX: (818) 772-7690		
PRODUCTION CODE: TOPHAT-188-S-T-X-.25-L3-LG-SSXX-BW-0		
	PART NO. T132-00000XXX	OCR # XXXXX
	DESCRIPTION: BEARING TC	
	DATE: XX/XX/XX	REV: NC