


REV	DESCRIPTION	DATE

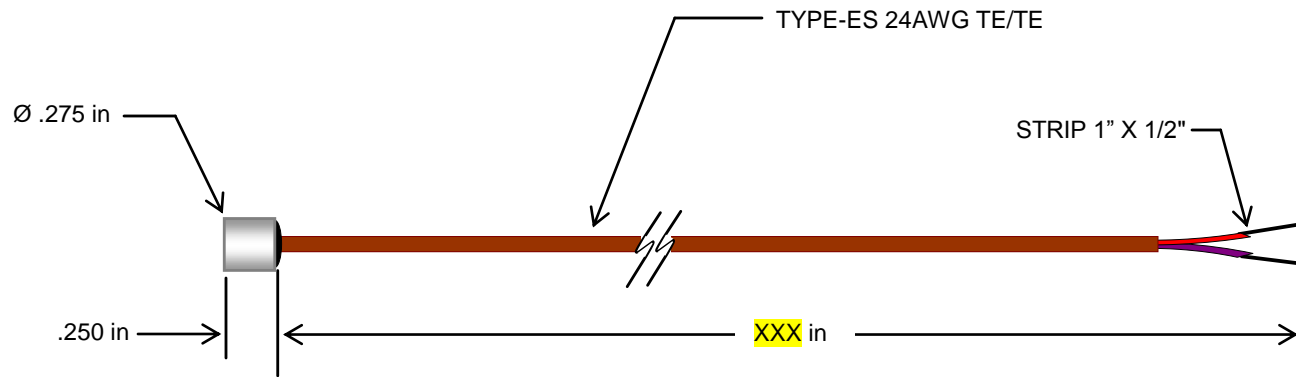

Approved by: \_\_\_\_\_ Ref: \_\_\_\_\_

**Specifications**

**ELEMENT:** TYPE-E (CHROMEL/CONSTANTAN) Special limits of error

**CONFIG:** Single

**TEMP RANGE:** -180 to 260°C (-300 to 500°F)

**CASE:** 300 series Stainless Steel.

**LEADS:** Teflon jacket/Insulation. (Teflon 0-500°F)

**TIME CONSTANT RANGE:** Typical value in moving water.

- Grounded Junction: 0.3 Seconds
- Ungrounded Junction: 1-6 Seconds

**INSULATION RESISTANCE:** 10megaOhms min. at 100VDC, leads to case, ungrounded junctions only.

18714 PARTHENIA STREET - NORTHRIDGE - CALIFORNIA 91324 - USA

PHONE: (818) 886-3755 - FAX: (818) 772-7690

**PRODUCTION CODE:** SS-275-S-E-X-.25-L3-LG-0-BW-0



**PART NO.** T132-00000XXX

**OCR #** XXXXX

**DESCRIPTION:** BEARING TC

**DATE:** XX/XX/XX

**REV:** NC