


REV	DESCRIPTION	DATE



SPRING

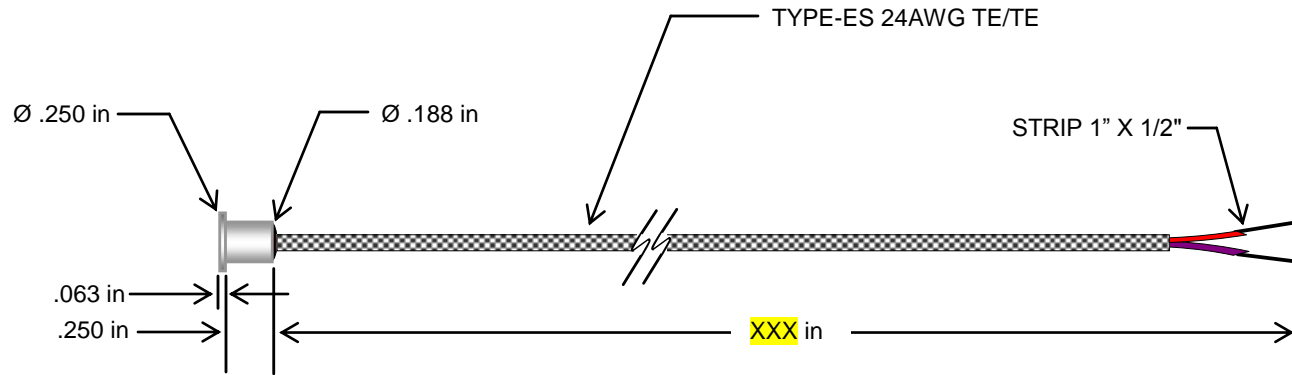

STAR WASHER

Large (.175"ID) ____
Small (.136"ID) ____

Approved by: _____ Ref: _____

Specifications

ELEMENT: TYPE-E (CHROMEL/CONSTANTAN) Special limits of error
CONFIG: Single
TEMP RANGE: -180 to 260°C (-300 to 500°F)
CASE: 300 series Stainless Steel.
LEADS: Teflon jacket/Insulation/SSOB. (Teflon 0-500°F)
TIME CONSTANT RANGE: Typical value in moving water.

- Grounded Junction: 0.3 Seconds
- Ungrounded Junction: 1-6 Seconds

INSULATION RESISTANCE: 10megaOhms min. at 100VDC, leads to case, ungrounded junctions only.

18714 PARTHENIA STREET - NORTHRIDGE - CALIFORNIA 91324 - USA
 PHONE: (818) 886-3755 - FAX: (818) 772-7690

PRODUCTION CODE: TOPHAT-188-S-E-G-.25-L3-LG-SSXX-BW-0



PART NO. T132-00000XXX	OCR # XXXXX
DESCRIPTION: BEARING TC	
DATE: XX/XX/XX	REV: NC