


REV	DESCRIPTION	DATE

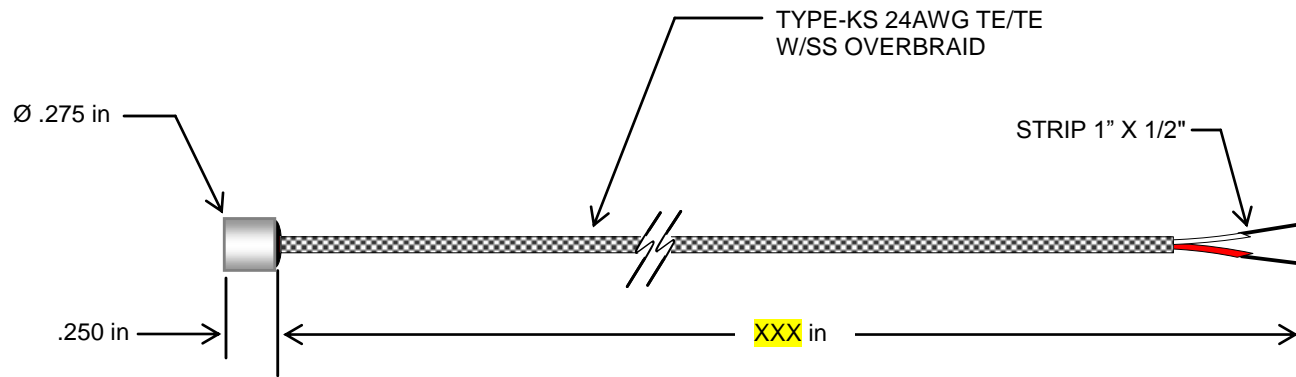

Approved by: _____ Ref: _____

Specifications

ELEMENT: TYPE-K (CHROMEL/ALUMEL) Special limits of error

CONFIG: Single

TEMP RANGE: -180 to 260°C (-300 to 500°F)

CASE: 300 series Stainless Steel (1600°C).

LEADS: Teflon jacket/Insulation/SSOB. (Teflon 0-500°F)

TIME CONSTANT RANGE: Typical value in moving water.

- Grounded Junction: 0.3 Seconds
- Ungrounded Junction: 1-6 Seconds

INSULATION RESISTANCE: 10megaOhms min. at 100VDC, leads to case, ungrounded junctions only.

18714 PARTHENIA STREET - NORTHRIDGE - CALIFORNIA 91324 - USA

PHONE: (818) 886-3755 - FAX: (818) 772-7690

PRODUCTION CODE: SS-275-S-K-X-.25-L3-LG-SSXX-BW-0



PART NO. T133-00000XXX

OCR # XXXXX

DESCRIPTION: BEARING TC

DATE: XX/XX/XX

REV: NC